



optical**CON** DUO | **Technical Paper**

Neutrik AG
Im alten Riet 143
9494 Schaan
Liechtenstein

© Copyright 2010 Neutrik AG
All rights reserved.



Subject:

Mechanical, electrical and optical tests applied to the opticalCON transmission system for Pro Audio / Video industry purposes with main focus on changes in attenuation.

Optical performance is being examined with regard to attenuation and its variation vs. environmental and mechanical conditions.

This documentation describes the results of the test series conducted at Neutrik AG, University of Applied Sciences of Technology Buchs NTB and Electrosuisse-Fehraltorf (SEV Association for Electrical Engineering, Power and Information Technologies).

The tests were carried out in accordance with the IEC-Standard main groups IEC 60794 and IEC 61300 as well as to Neutrik internal specifications.



Content of Test Reports

1	Optical Attenuation	4
2	Vibration	6
3	Cable Retention	9
4	Locking Mechanism	10
5	Impact	11
6	Mating Durability	13
7	Advanced Durability Test	16
8	Change of Temperature	17
9	Flexing	19
10	Dust	21
11	Sealing Gasket	23
12	Cable Drum	24
13	Contact Resistance	25
14	Dielectric Strength	26
15	Insulation Resistance	27
16	Current Capacity	28



1 Optical Attenuation

Object:

Examination of the receptacle NO2-4FD in combination with the OpticalCON® cable connector to determine the attenuation in a fiber optic system.

For the test of the cable connector a completely assembled OpticalCON cable was used. See fig. 1.

Test Set-Up:

Test specimens:

Single-mode: NKO2SA-0-2 (2 m length)
Multimode: NKO2M-0-1 (1 m length)

Test procedure according to IEC 61300-3-4 figure 4 with mode filter described in table 3 for multimode, for single-mode no mode filter was used.

Test equipment: light source EXFO FLS-600
power meter EXFO FPM-600

Launching cables: 0.9 mm precision fibres

Reference complex: precision adapter FLC-FLC

Measuring wave lengths: Single-mode 1,310 nm
Multimode 850 nm

Cable length: Single-mode 2 m
Multimode 1 m

Comment: Short cable lengths do not affect attenuation remarkably and are therefore not considered.



1 Optical Attenuation (contd.)

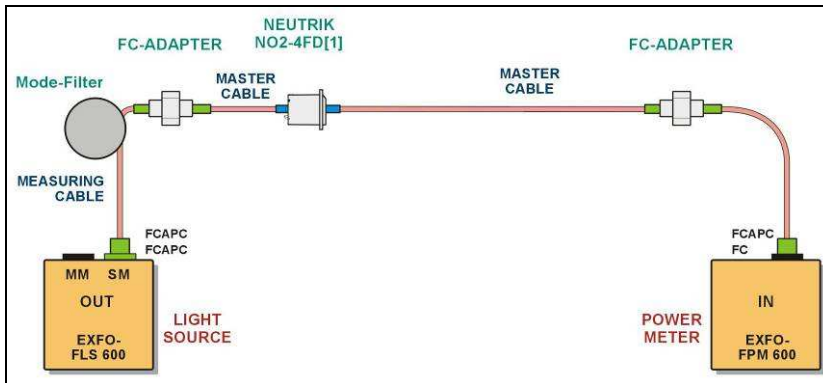


Fig. 1

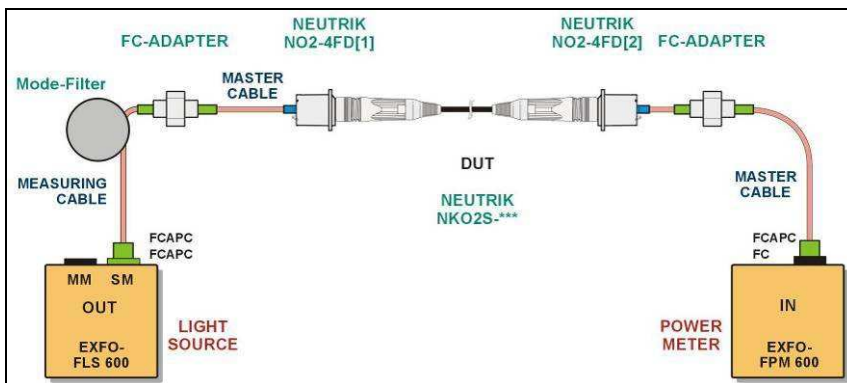


Fig. 2: Simplified measuring arrangement

Limit Values (per mating pair):

Single-mode: 0.5 dB
Multimode: 0.35 dB

Results:

Basis of test series: 50 sets of cable assemblies

Single-mode: 0.10 – 0.44 dB
Multimode: 0.08 – 0.32 dB



2 Vibration

Object:

Examination of the two components, receptacle NO2-4FD and the OpticalCON® cable connector. The intention of the test was to determine their attenuation in a fiber optic system before, during and after the vibration test.

In addition the test presents the change in contact resistance of the electrical contacts as well as the function of the mechanical locking system and the wear.

The test was carried out by an independent laboratory: NTB, "Interstaatliche Hochschule für Technik Buchs" division "Labor Mess- und Simulationstechnik" located in Buchs/ Switzerland.

Test Set-Up:

For the vibration test two receptacles NO2-4FD per axis were mounted. The front side was mated with a NKO2M-4S75-0-1 OpticalCON cable. The rear end was connected with the test instrument via precision measuring cables (see fig. 3 a/b).

The applied test set-up complies with IEC 61300-2-1 table 1.

Shaker:	TIRAVIB Model 5200, controlled by an external power amplifier and a PC with software VibeLab-Pro (fig. 3 a/b).	
Test instruments:	light source	EXFO FLS-600
	power meter	EXFO FPM-600
Launching cables:	0.9 mm precision fibres, assembled by H&S	
Measuring wave lengths:	single-mode	1,310 nm
	multimode	850 nm
DUT cable length:	single-mode	2 m
	multimode	1 m
Comment:	Short cable lengths do not affect attenuation remarkably and are therefore not considered.	



2 Vibration (contd.)

Vibration Severity:

Frequency range:	10 – 55 Hz
Amplitude displacement:	1.52 mm (3.04 mm p-p)
Acceleration:	up to 20 g (200 m/s ²)
Sweep rate:	2 min/cycle
Number of sweeps:	15
Axis:	X, Y, Z

After 15 cycles the receptacles were changed to the next axis without disconnecting the pugs to avoid any mismatching.

Results:

Attenuation before, during and after vibration test:

Changes in attenuation:

Single-mode: - 0.08 dB to - 0.03 dB
Multimode: - 0.03 dB to + 0.13 dB

The reason for the attenuation improvement compared to the initial values may result from new positioned ferrules as a result of vibration.

Measurement during vibrations showed no variation in attenuation.

Electrical Contact Resistance

The contact resistance has changed from 4.6 mΩ average to 4.7 mΩ per contact.

Mechanical

The locking mechanism withstands this extreme vibration without any problems, i. e. no separation or functional deterioration occurred.



2 Vibration (contd.)



Fig. 3a: Vibration equipment and test cable arrangement

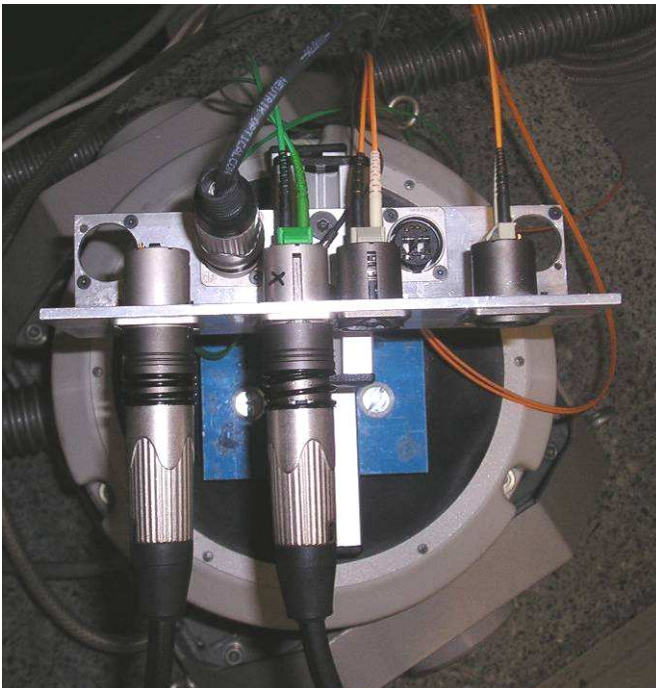


Fig. 3b: Vibration equipment and test cable arrangement



3 Cable Retention

Object:

Test of the cable retention efficiency. The OpticalCON cables NKO* were exposed to tractive forces until the cable started to move.

Test Set-Up:

The applied test procedure is referred to IEC 61300-2-4.

Tension-Tester: Versa Test Mecmesin 0-1,000N (fig. 4)

Measuring Instruments: AFG-R 1000N Mecmesin

Assembled cable types:
NKO2M-0-1 (multimode 2 fibers)
NKO2M-4S75-0-1 (multimode 2 fibers and 4 copper wires)
NKO2SA-0-1 (single-mode 2 fibers)
NKO2SA-S1-0-1 (SMPTE single-mode 2 fibers and 4 copper wires)

Results:

NKO2M-0-1: > 500N
NKO2M-4S75-0-1 > 500N
NKO2SA-0-1 > 500N
NKO2SA-S1-0-1 > 350N



Fig. 4: Equipment for examination of cable retention



4 Locking Mechanism

Object:

Tensile strength measurement of the locking mechanism.

Test Set-Up:

Same test set-up as used in clause 3. Cable Retention. Instead of the cable a mechanical adapter was used to fix the plug.

Results:

Tensile strength > 1,000N

At a force of 1,000N the test was stopped without any damages of the locking device.



5 Impact

Object:

The impact test is performed to show possible deformations or plug malfunction of the internal mechanism due to heavy mechanical exposure.

Test Set-Up:

The applied test procedure is referred to the IEC 61300-2-12 Method A pendulum drop (fig. 5).

Test item: opticalCON cable connector

First part of test: front side of connector protected by a protection cap of EPDM (protection cap is supplied with each cable drum)

Second part of test: no connector protection

Parameters of Test:

Distance from centre of rotation:	2.25 m
Number of drops:	5
Height of falling:	1.0 – 1.9 m
Ground:	steel plate, thickness 25 mm
Plug fixation:	small wire

Results:

Tests 1 – 3: No visible abrasions, no functional problems

Test 4: Minimal abrasions at the edge of the plug, but no functional problems



5 Impact (contd.)



Fig. 5: Test set-up "Impact"

Test #	with cap	drop height m	drops	comment	result
1	yes	1.0	5		no visible abrasion full function
2	yes	1.9	5		no visible abrasion full function
3	yes	1.0	5	extremely manual acceleration	no visible abrasion full function
4	no	1.5	5	valuation after each drop	minimum abrasion full function

Table 1: Impact test IEC 61300-2-12 method A



6 Mating Durability

Object:

The mating durability test was carried out to show variations in attenuation (optical) and of electrical contact resistance after lifetime.

Test parameter:

NKO2S-0-1 (single mode 2 fibres)

NKO2S-S1-0-1 (SMPTE; single-mode 2 fibres and 4 copper wires)

Test Set-Up:

Test procedure according to IEC 61300-2-2 in combination with IEC 61300-3-4 figure 4 with mode filter as defined in table 3 for multimode, no mode filter for single-mode.

Contact resistance measurement according to IEC 60512-2.

The test was realized with the equipment shown in fig. 6.

Mating cycles:	500 (durability test) 5000 (lifetime test)	
Launching:	light source power meter	EXFO FLS-600 EXFO FPM-600
Microscope:	enlarged x 200	
Measuring cables:	0.9 mm precision fibres, assembled by H&S	
Measuring wave lengths:	single-mode	1,310 nm
DUT cable length:	single-mode	1 m

Results:

500 cycles (durability test):

The microscopic assay didn't show any reasonable degradation. The attenuation values still fulfill Neutrik's internal requirements of < 0,5 dB/connection.

Single-mode: 0.45 dB degradation without cleaning, 0.25 dB degradation after cleaning

The test results of the electrical contacts are handled in chapter 11.

5000 cycles (lifetime test)

The visual inspection didn't show any reasonable degradation from the condition of the fiber (scratches, soil remains, outbreaks, etc.)

The functionality from the shutters as well as the locking mechanism is warranted.

During measuring procedure there are no significant variations.

Measuring	Before lifetime test	After lifetime test
Return Loss	58.3	56.8
Insertion Loss	0.16	0.25



6 Mating Durability (contd.)

500 cycles - Durability test



Fig. 6: measuring setup for durability and lifetime test

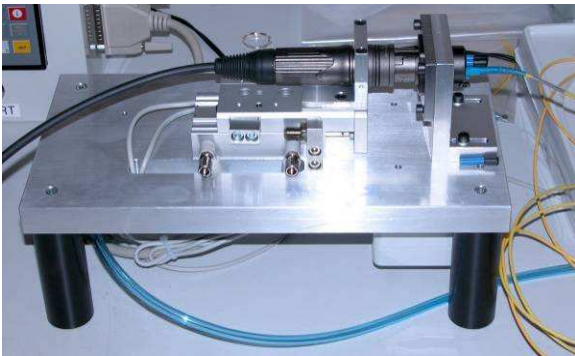


Fig. 7 fixture for 500 and 5000 mating cycles.

Fiber condition

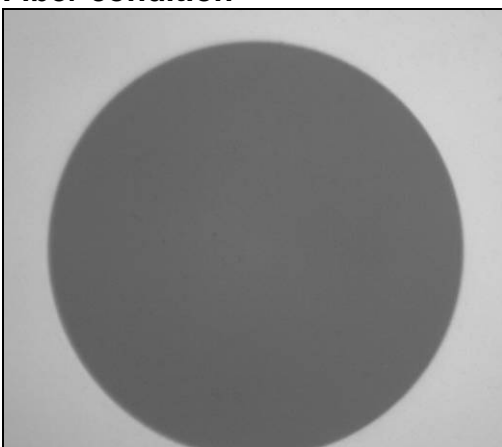


Fig 8

channel 1 (single-mode)
- no visual degradation
(scratches, soil, etc.)

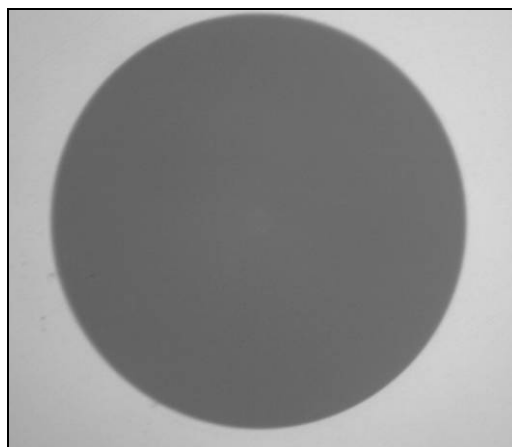


Fig. 8

channel 2 (single-mode)
- no visual degradation
(scratches, soil, etc.)



6 Mating Durability (contd.)

5000 cycles - Lifetime test

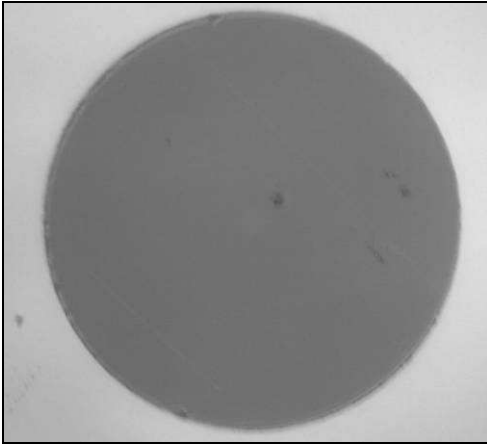


Fig. 10

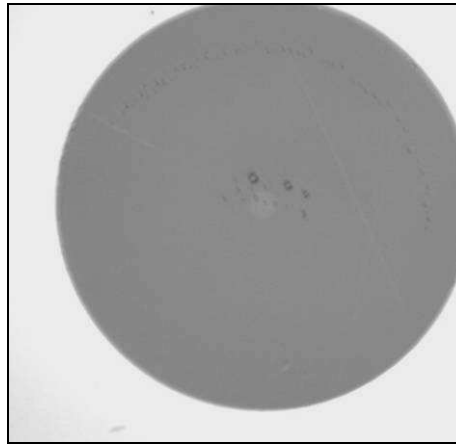


Fig. 11

CH1 and CH2 didn't indicate a significant degradation. Partly some soil remains around the core which has no reasonable influence of the measurement parameters (see table on the top).



Fig. 12

No mechanical degradations on the opticalCON DUO cable connector.



Fig. 13

Proper functionality of the shutter and locking mechanism



7 Advanced Durability Test

Object:

The advanced durability test is performed to show possible deformations or plug malfunction of the internal mechanism due to heavy mechanical exposure after conditioning cabinet.

Test parameter:

opticalCON chassis: NO2-4FDW

Test Set-Up:

The opticalCON chassis NO2-4FDW stays 24 hours in the conditioning cabinet with defined temperature cycles. After the temperature test procedure the opticalCON chassis starts a 5000 mating lifetime test.

Mating cycles:	5000
Fixture:	internal mating cycle test fixture (see section 6)
cable	NKO2S-R-0-5
Conditioning cabinet:	WEISS WK11-180/40
Test temperatures:	-20°C / +75°C
Humidity:	10%
Duration:	24 hours

Results:

After 5000 mating cycles and temperature test the opticalCON chassis NO2-4FDW (figure 14) didn't show any significant deformations or mechanical malfunction. The greased O-ring didn't indicate any cracks or rough areas (figure 15).



Fig. 14: Test chassis NO2-4FDW



Fig. 15: O-ring after 5000 mating cycles



8 Change of Temperature

Object:

Variations in attenuation due to temperature changes.

The test was arranged with a single-mode cable drum which is more critical than multimode.

Test Set-Up:

Test procedure according to IEC 61300-2-22 in combination with IEC 61300-3-4 (figure 16)
The test was realized in a temperature testing chamber type WEISS WK11-180/40.

Test cycles: 16 (96h)

Profile of temperature: -25°C to +75°C (fig. 6)

Test instruments:	light source	EXFO FLS-600
	power meter	EXFO FPM-600

Launching cables: 0.9 mm precision fibers, constantly connected with the DUT (device under test) through a hole in the test chamber.

Measuring wave lengths: single-mode at 1,310 nm

Cable length: 300 m

Test specimen: NKO2SA-3-300

Results:

Maximum increase in attenuation 0.42 dB over the whole temperature range.



8 Change of Temperature (contd.)

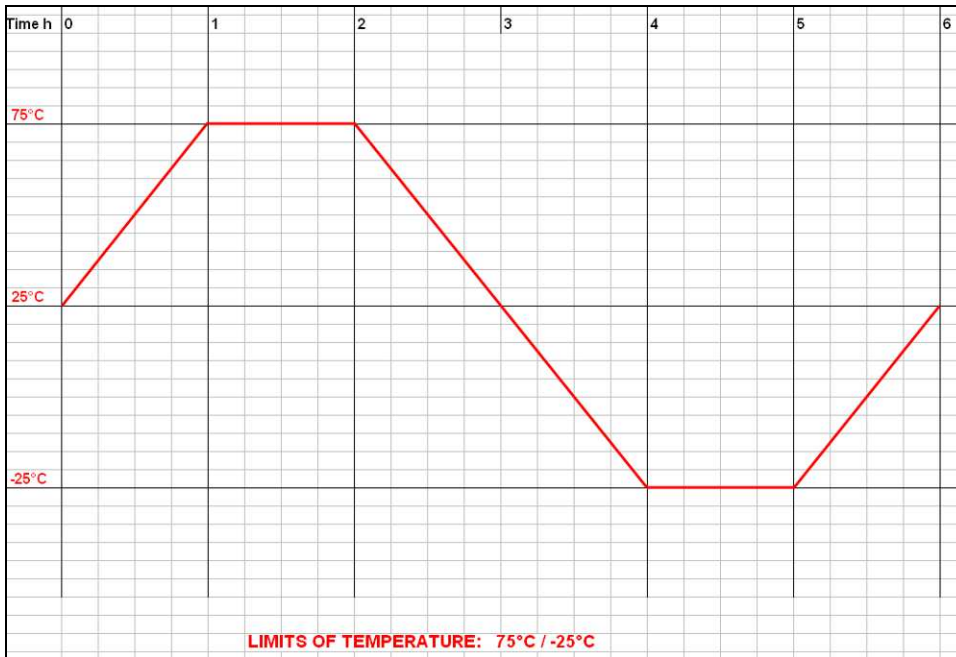


Fig. 17: Profile of temperature



9 Flexing

Object:

Variations of attenuation and mechanical damage of fiber optic cable due to a defined flexing procedure.

Assembled cable types:

NKO2M-0-1 (Multimode 2 fibres)

NKO2SA-0-1 (single-mode 2 fibres)

NKO2SA-S1-0-1 (SMPTE; single-mode 2 fibres and 4 copper wires)

Test Set-Up:

Measurement of attenuation before, during and after flexing cycles.

Test procedure according to IEC 61300-2-44 in combination with IEC 61300-3-4 figure 18 with mode filter as defined in table 3 for multimode, no mode filter for single-mode.

Test equipment:	fig. 7 and 8	
Test cycles:	1,000 / 5,000	
Mass of weight:	10 N or 20 N depending on cable type	
Flexing angle:	$\pm 90^\circ$	
Flexing speed:	ca. 12 cycles/min	
Test Instruments:	light source	EXFO FLS-600
	power meter	EXFO FPM-600
Launching cables:	0.9 mm precision fibers, assembled by H&S	
Measuring wave lengths:	single-mode	1,310 nm
	multimode	850 nm
DUT cable length:	single-mode	1 m
	multimode	1 m



9 Flexing (contd.)

Results:

a) Change in attenuation:

Single-mode 0.05 dB to 0.20 dB

Multimode 0.00 dB to 0.03 dB

b) Mechanical cable damage:

1,000 cycles: no damage

5,000 cycles: no significant damage, single strands (AWG 16) of SMPTE cable partly broken.

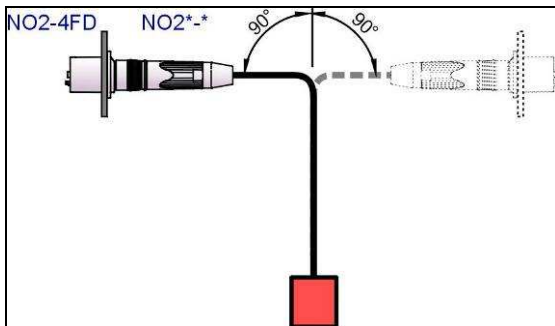


Fig. 18: Principle of Test according to IEC 61300-2-44 (IEC 61300-3-4)

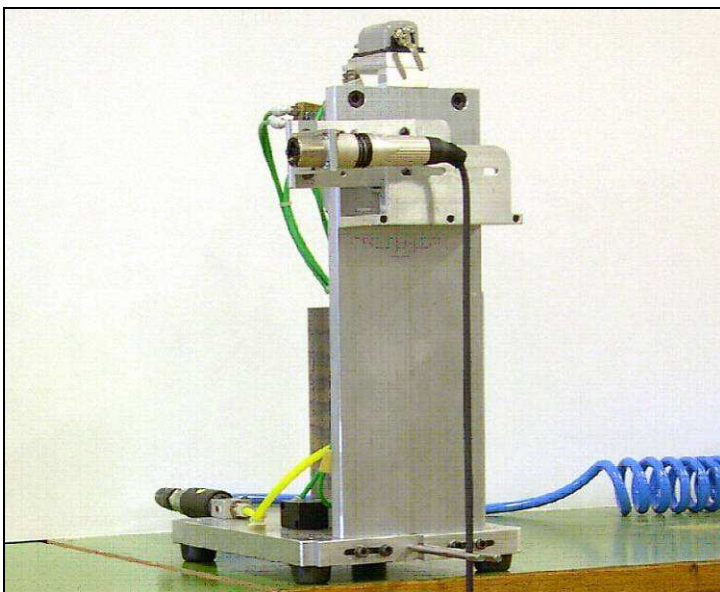


Fig. 19: Test Equipment and Fixture for flexing test



10 Dust

Object:

Variations of attenuation due to massive dust penetration. The test was carried out with single-mode cables where soiling of the connecting surface effects much more attenuation than at multimode cables.

The test was carried out by an independent laboratory: Electrosuisse, test laboratory PQ/PIK in 8320 Fehraltorf, Switzerland.

Test Set-Up:

The OpticalCON connector was exposed to dust from both sides in wired condition for 60 minutes. The built-in sealing shutters protected the optical conductor at the front side, the plugged-in LC-Duplex connectors shielded the rear side.

Test procedure according to IEC 61300-2-27 in combination with IEC 61753-1-1 Tab. A5 Test No.16 and IEC 61300-3-4 figure 4.

Test specimen:	NO2-4FD - Receptacle	
Particle size:	d < 150 µm	
Dust type:	talcum powder	
Temperature:	19°C	
Relative humidity:	54%	
Duration of penetration:	1 h	
Test Instruments:	light source	EXFO FLS-600
	power meter	EXFO FPM-600
Launching cables:	0.9 mm precision fibers	
Measuring wave lengths:	1310 nm (single-mode)	
DUT cable length:	2 m (single-mode)	



10 Dust (contd.)

Results:

	Attenuation	Initial	After Contamination
NO2-4FD-R	A	0.31	0.34
	B	0.36	0.38
NO2-4FD	A	0.38	0.39
	B	0.33	0.36

Table 2: Dust test - attenuation in dB

Channel A was defined as for the front side of the receptacle

The corresponding power level was calibrated at 4.91 dBm @ 1310nm (= 0.00dB)

Maximum increase in attenuation: 0.03 dB

The IP rating can be defined with IP 5x.



Fig.20: Dust sediment on the rear side of the receptacle after 60 min.



Fig. 21: Dust sediment on the front side of the receptacle after 60 min.



11 Sealing Gasket

Object:

Durability test of the sealing cover surface. Long-term load of the closed sealing cover by a constant laser beam.

The intention is to find out if the silicon layer alters or a deposition is formed on the fiber surface of the connector.

Test Set-Up:

An interconnection was inserted into a chassis connector type NO2-4FD from the rear. The fiber surface of the interconnection had direct contact to the cover surface.

The second end of the interconnection was connected to a light source.

Light source:	EXFO FLS-600
Power meter:	EXFO FPM-600
Test parameter:	Wavelength: 1310nm
Output power:	4.6dBm (referenced 0dB)
Duration:	12h

Result:

No difference between referencing and measuring after the duration of test: $\pm 0\text{dB}$.

The surfaces of the fiber and the gasket as well showed no mechanical variation in the area of the fiber contact (checked by microscope).

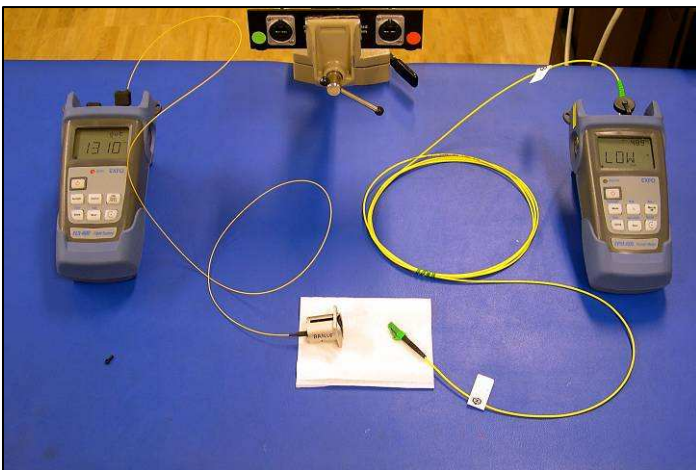


Fig. 22: Test Set-Up



12 Cable Drum

Object:

Variations of attenuation due to winding quality on cable drums.

First part of the test: attenuation measurement of perfectly wounded drum

Second part of test: attenuation measurement of unwinded cable

Third part of the test: spooling of the cable drum in a typical on stage manner,
i. e. with a lot of crossed cable windings; attenuation measurement

Test Set-Up:

Test procedure according to chapter 1 Attenuation.

Parameters:

Drum assembly: NKO2SA-3-1000
Cable length: 1,000 m
Wave length: 1,310 nm

Results:

First test (spooled cable drum):

channel A: 0.34 dB

channel B: 0.37 dB

Second test (unwinded cable drum): change in attenuation - 0.04 dB to - 0.07dB

Third test (spooled cable drum): increase of initial attenuation + 0.01 dB
to + 0.08 dB



13 Contact Resistance

Object:

Initial value and variation of contact resistance.

opticalCON cable connector mated with the receptacle NO2-4FD before and after 1000 mating cycles.

Test Set-Up:

Test procedure according to IEC 60512-2 test 2a

Measuring Instrument: HIOKI – 3540 Millivoltmeter

Results:

Contact Resistance [mΩ]		
	measured average value	conditional value
initial	4.6	6.0
after 1,000 cycles	5.7	7.0

Table 3: contact resistance



14 Dielectric Strength

Object:

Same test set-up as used in clause 11 Contact Resistance. It was checked in completely mated, half mated and unmated condition. Each combination of contact to contact and contact to shell was judged.

Test Set-Up:

Test procedure according to IEC 60512-2 test 4a

Measuring Instrument: GOR-1 Dielectrometre

Test Parameter: 0 – 6 kV

The conditional value of dielectric strength was defined with > 1.5 kV.

Results:

Minimum dielectric strength: 2.0 kV



15 Insulation Resistance

Object:

Same test set-up as used in clause 11 Contact Resistance.

Test Set-Up:

Test procedure according to IEC 60512-2 Test 3a

Measuring Instrument: METRISO C
maximum measurable isolation resistance 100 G Ω

Test Parameter: test voltage 500V DC

The insulation resistance was defined with > 10G Ω .

Results:

Minimum insulation resistance: 64.7G Ω



16 Current Capacity

Object:

Temperature rise of contacts as a result of electrical current.

Test Set-Up:

Test procedure according to IEC 60512-5-1 test 5a

Current source: VAREG, 3V 0-50 A rms

Measuring Instrument: TESTO 935 Thermometer, 2 channels
-50 - +350°C

The maximum temperature rise was defined generally with $< 40K$.

The measurements were realized for the following wires and currents:

- 1 contacts 1-4 wired with 0.22 mm², 6 Amps through all contacts
- 2 contacts 1+4 wired with 1.5 mm², 10 Amps through both contacts in case of SMPTE application
- 3 contacts 1+4 wired with 1.5 mm², 10 Amps through both contacts and additionally contacts 2+3 wired with 0.22 mm², 1 Amp through both contacts in case of SMPTE application.

Results:

Ad 1: 26.7K

Ad 2: 23.1K

Ad 3: 28.6K

A rated current of 6 A (10 A for the SMPTE cable) can be defined.